LED TUBE ST8

INDOOR LIGHTING

THOMSON Lighting

RANGE TT8 600 / 1200 / 1500mm (Temporary card)

- SWIVELING BASE AT 90° IN BOTH DIRECTIONS
- DIRECT RELAMPING (Fuse for replacement starter provided)
- AVAILABLE IN GROUND, TRANSPARENT, AND STRIP DIFFUSER



TT8xK10FR60	10W➡18W Tube T8 Fluorescent	TT8xK25FR120	25W➡42W Tube T8 Fluorescent	TT8xK30FR150	30W➡56W Tube T8 Fluorescent

FEATURES	TT84K10FR60	TT84K10FR60	TT84K25FR120	TT86K25FR120	TT84K30FR150	TT86K30FR150
Power in W	10W		25W		30W	
Voltage	220~240V					
Luminous flux	700lm	800lm	1850lm	1950lm	2500lm	2600lm
CCT	4000K	6000K	4000K	6000K	4000K	6000K
IRC	80		80		80	
Angle of ray	120°		120°		120°	
Material	Aluminium / PCB					
Base	G13					
Index of Protection	IP20					
Dimension (DxL in mm)	Ø28x600mm		Ø28x1200mm		Ø28x1500mm	

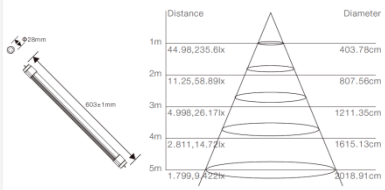

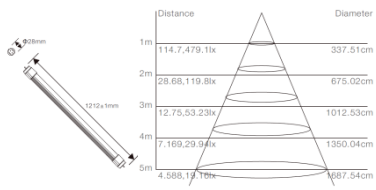

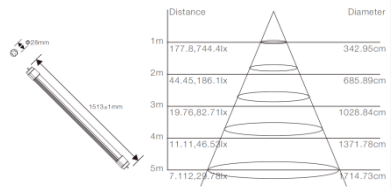

APPLICATIONS



IDEAL FOR STORES,CAR PARKING GARAGES, GROCERY STORES, WHAREHOUSES,..

CERTIFICATES

CE RoHS Compliant

CERTIFICATES LVD, EMC and RoHS.

To comply with environmental regulations, Thomson Lighting finances the WEEE subsidiary that is dedicated to collect used electric and lighting equipment for free. For more information go to www.recyclum.com

DEEE PRO ADHERENT